

TABLE & ROW FUNCTIONS IN DB2 12

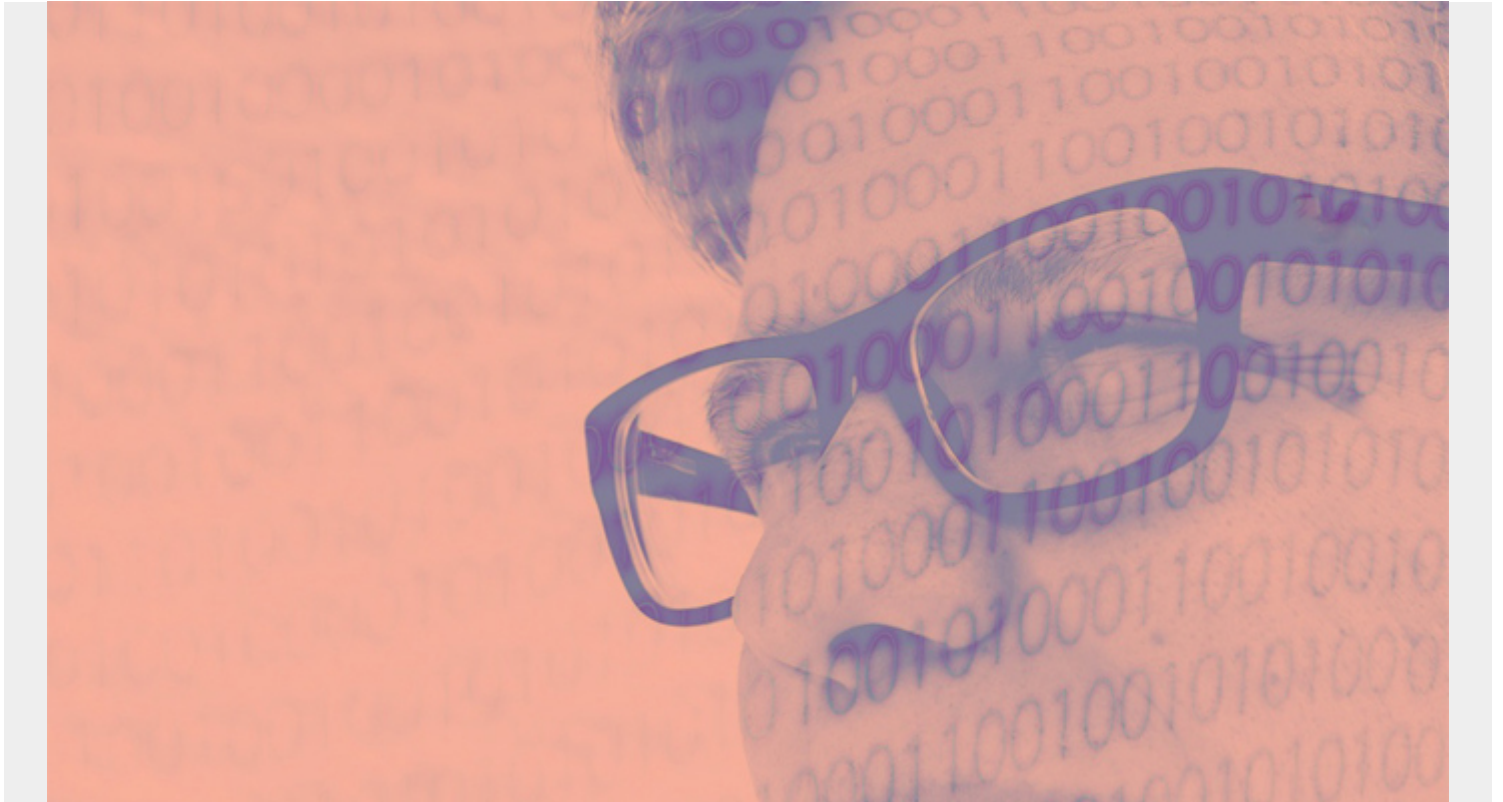


TABLE FUNCTIONS

ADMIN_TASK_LIST

>_ADMIN_TASK_LIST() _____>

ADMIN_TASK_OUTPUT

>_ADMIN_TASK_OUTPUT(_task-name_,_num-invocations) _____>

ADMIN_TASK_STATUS

>_ADMIN_TASK_STATUS(_____) _____>
 I_max-history_I

(This article is part of our [Db2 Guide](#). Use the right-hand menu to navigate.)

XMLTABLE

```
>_XMLTABLE_(_____row-xquery-expression-constant____>
            |xmlnamespaces-declaration_,_|
>
|
|_____<_____,_____||_BY REF_|_|
|_PASSING_|_____|_____row-xquery-argument_____|_____|
>
|_____</____><_____,_____||
|_COLUMNS_____xml-table-regular-column-definition_____|_)_|
|_____xml-table-ordinality-column-definition_|
```

Row-xquery-argument:

```
>_xquery-context-item-expression_____>
|_xquery-variable-expression_AS_identifier_|
```

Xml-table-regular-column-definition:

```
>_column-name_data-type_____>
|_default-clause_____|
|_PATH_column-xquery-expression-constant_|
```

Xml-table-ordinality-column-definition:

```
>_column-name_FOR ORDINALITY_____>
```

ROW FUNCTIONS

UNPACK

```
>_UNPACK(expression)_____>
</__>
```

Disclaimer: This Db2® 12 for z/OS Reference Guide was developed to help users in their daily activities in administrating and programming in Db2 for z/OS. There are no guarantees expressed or implied with the contents in this guide. We want to provide a quality and useful reference for users. Please notify us of any mistakes or errors in this reference guide at blogs@bmc.com. Db2 is a registered trademark of the IBM Corporation.